

Prima

# AP 6.5P



Woofers component  
**330 W**



TECHNICAL SPECIFICATIONS		
Component		Woofers
Size	mm (in.)	165 (6.5)
Power Handling	W peak	330
	W continuous	110
Impedance	Ω	4
Frequency Response	Hz	50 - 5k
Magnet size D x d x h	mm (in.)	100 x 40 x 18 (3.94 x 1.57 x 0.71)
Weight of one speaker	kg (lb.)	1,45 (0.32)
Voice Coil Ø	mm (in.)	32 (1.26)

ELECTRO-ACOUSTIC PARAMETERS		
D	mm	132
Xmax	mm	±5,6
Re	Ω	3,1
Fs	Hz	60
Le	mH	0,29
Vas	l	11,4
Mms	g	14,6
Cms	mm/N	0,47
BL	T·m	5,35
Qts		0,55
Qes		0,6
Qms		7,6
Spl	dB	92,5

- 1 Increased excursion of the mobile group for a superior dynamic response
- 2 Optimized electro-acoustic parameters to maximize performance for OEM placements
- 3 Magnetic group sized for perfect control even at maximum cone excursion
- 4 CCAW (Copper-Clad Aluminium Wire) voice coil (32 x 14 mm) to optimally manage the greater applied power
- 5 Compact size basket for easy OEM installations

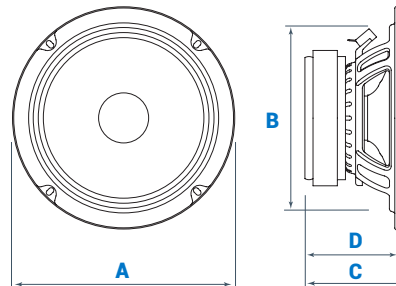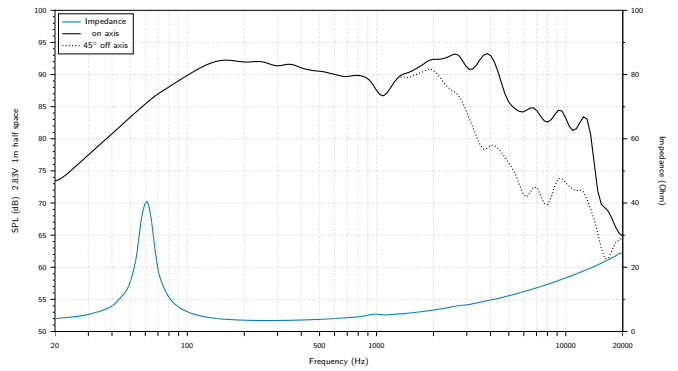

A	B	C	D
165 mm	141 mm	75 mm	66,5 mm
6.5 in.	5.55 in.	2.95 in.	2.62 in.



**Elettromedia**  
62018 Potenza Picena (MC) Italy  
T +39 0733 870 870 - F +39 0733 870 880  
elettromedia.com

