

SX 200 NEO

SPL COAXIAL
260 W



PRELIMINARY



TECHNICAL SPECIFICATIONS

Component		SPL Coaxial
Woofer size	mm (in.)	200 (8)
Tweeter size	mm (in.)	35 (1.4)
Power Handling	W peak	260
	W continuos	130
Impedance	Ω	4
Frequency Response	Hz	100 ÷ 20k
Sensitivity	dB/SPL	99,5
Woofer Magnet size D x d x h	mm (in.)	80 x 50 x 6 (3.15 x 1.97 x 0.24)
Tweeter Magnet size D x h	mm (in.)	19 x 3 (0.75 x 0.12)
Woofer Voice Coil Ø	mm (in.)	28 (1.1)
Woofer Voice Coil Ø	mm (in.)	38 (1.5)
Tweeter / Woofer Magnet	Neodymium	
Tweeter	Pei	
Cone	Water repellent pressed paper	
Weight of one component	kg (lb.)	1,32 (2.91)

ELECTRO-ACOUSTIC PARAMETERS

D	mm	168
Xmax	mm	2,7
Re	Ω	3,3
Fs	Hz	103
Le	mH	0,07
Vas	l	9,70
Mms	g	17
Cms	mm/N	0,14
BL	T·m	8,2
Qts		0,51
Qes		0,54
Qms		8,9
Spl	dB	99,5

1. Nature-proof high stiffness pressed-paper cone featuring innovative water/ humidity resistant and anti-UV treatments.
2. Durable Extreme SPL performance in a compact size & light-weight thanks to the N38 H Neodymium grade magnet.
3. Unparalleled power handling delivered by the double layer copper voice coil, wound on polyamide former.
4. Hi-SPL 1.4" Neodymium magnet PEI dome tweeter with resettable solid-state tweeter protection circuit.
5. Double faston terminals allow daisy-chaining of multiple units and provide compatibility with most common motorcycle connections.

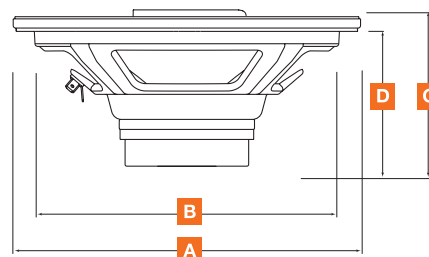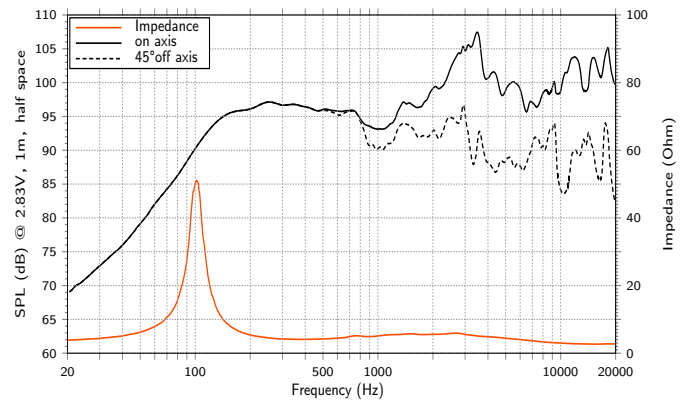

A	208 mm	8.19 in.
B	182,7 mm	7.19 in.
C	96,2 mm	3.79 in.
D	82,8 mm	3.26 in.

