

Prima

APBMW X4E

Coaxial for BMW-MINI




TECHNICAL SPECIFICATIONS		
Component		Coax
Midrange size	mm (in.)	100 (4)
Tweeter diaphragm	mm (in.)	24 (0.9)
Power Handling	W peak	80
	W continuous	40
Impedance	Ω	4
Frequency Response	Hz	100 ÷ 22k
Magnet size D x d x h	mm (in.)	50 (1.97) x 29 (1.14) x 3 (0.12)
Weight of one speaker	kg (lb.)	0,5 (1.1)
Woofer Voice Coil Ø	mm (in.)	25 (1)
Tweeter Voice Coil Ø	mm (in.)	20 (0.8)

ELECTRO-ACOUSTIC PARAMETERS		
D	mm	80
Xmax	mm	±0,5
Re	Ω	3,4
Fs	Hz	100
Le	mH	0,32
Vas	l	1,8
Mms	g	5,8
Cms	mm/N	0,5
BL	T·m	5,4
Qts		0,38
Qes		0,4
Qms		6,2
Spl	dB	88

From R&D to
final product
KLIPPEL
since 2005

- Specially developed for BMW-Mini models** that do not allow the installation of a two-way system on the front or for rear seat upgrade;
- Neodymium Magnetic group** to maximize performance while minimizing bulk and weight;
- 25 mm (1") fiberglass woofer voice coil** for high power dissipation and stiffness;
- Waterproof pressed-paper cone** for medium natural frequencies free from any plastic resonance;
- 20 mm (0.8") Tetolon coil tweeter with **dispersion characteristics optimized with FEM simulations**;
- BMW-Mini compatible **aluminium die-cast basket** with Plug & Play connectors;
- 30 cm extension provided featuring Plug & Play connectors**, for high flexibility of installation;
- Damping removable motor cover**.

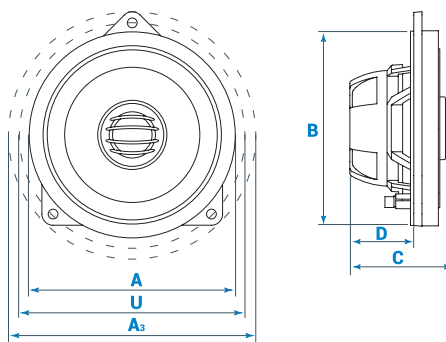

A	A3	B	C	D	U
102 mm	128 mm	91 in.	63,5 mm	44,5 in.	116,5 in.
4.02 in.	5.04 in.	3.58 in.	2.5 in.	1.75 in.	4.59 in.

BMW and MINI are trademarks of BMW AG (Bayerische Motoren Werke Aktiengesellschaft)

Technology Art-Sound
Manufactured by
elettromedia

Elettromedia
62018 Potenza Picena (MC) Italy
T +39 0733 870 870 - F +39 0733 870 880
www.elettromedia.it

audison